# **Incandescent Vanity Light**

VL57732-BK

### START FROM HERE

- Make sure **POWER** is **COMPLETELY OFF** at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all time during this installation
- · Read instructions carefully before you start assembly
- Keep this installation sheet for future reference


**Technical Support:** 1-855-855-8926

### Please Note:

- · Black Finish Only
- 120V input

- 1. Remove fixture from its original package
- 2. Separate mounting plate (1c) from canopy (2a) by removing canopy screws (2b)
- **3.** Attach mounting plate (1c) to electrical junction box (1a) using junction box screws provided (1e) in hardware package
- **4.** Secure mounting plate (1c) to mounting surface with screws (1g) and anchors (1f)

- **5.** Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package
- **6.** Attach canopy (2a) to mounting plate (1c) with canopy screws (2b)
- 1. Insert bulb (4a) into fixture socket

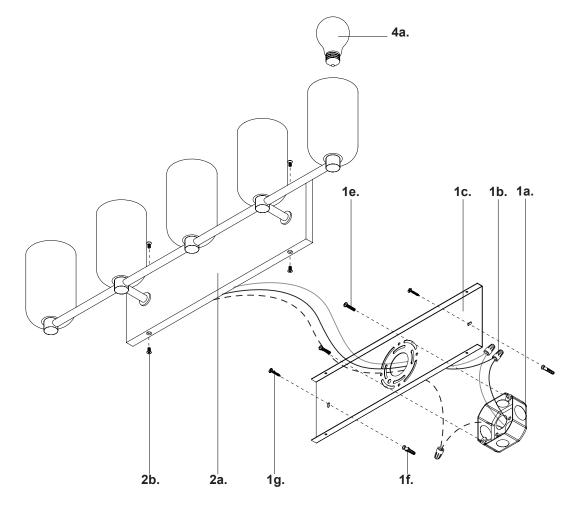



## VL57732-BK/GO VL57732-BG/GO VL57732-CH/GO

### **Incandescent Vanity Light**

INSTALLATION SHEET

#### START FROM HERE

- Make sure **POWER** is **COMPLETELY OFF** at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- · Wear gloves at all time during this installation
- · Read instructions carefully before you start assembly
- · Keep this installation sheet for future reference

**Technical Support:** 1-855-855-8926

- **1.** Remove fixture from its original package
- 2. Separate mounting plate (1c) from canopy (2a) by removing canopy screws (2b)
- **3.** Attach mounting plate (1c) to electrical junction box (1a) using junction box screws provided (1e) in hardware package
- **4.** Secure mounting plate (1c) to mounting surface with screws (1g) and anchors (1f)
- **5.** Make proper electrical connections (**black** to **hot** "L", **white** to **neutral** "N", **ground** to "**GND**") with wire nuts (**1b**) provided in hardware package
- **6.** Attach shade (3b) to fixture (3a) and secure with shade connector (3c), followed by socket nut (3d) using socket nut tool (3e)

- Black, Brushed Gold Or Chrome With Glossy Opal Glass Finish Only
- 120V input

Please Note:

- Attach canopy (2a) to mounting plate (1c) with canopy screws (2b)
- **8.** Insert bulb (4a) into fixture socket

